

GBU8A THRU GBU8M

SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIER

Voltage: 50 to 1000V

Current:

8.0A




Features

Ideal for printed circuit board
Glass passivated chip junction
High case dielectric strength
High surge overload rating
This series is UL listed under Recognized Component Index, file number E185029

Mechanical Data

Terminal: Plated leads solderable per MIL-STD 202E, method 208C
Case: UL-94 Class V-0 recognized Flame Retardant Epoxy
Polarity: Polarity symbol marked on body
Mounting position: Thru hole for #6 screw

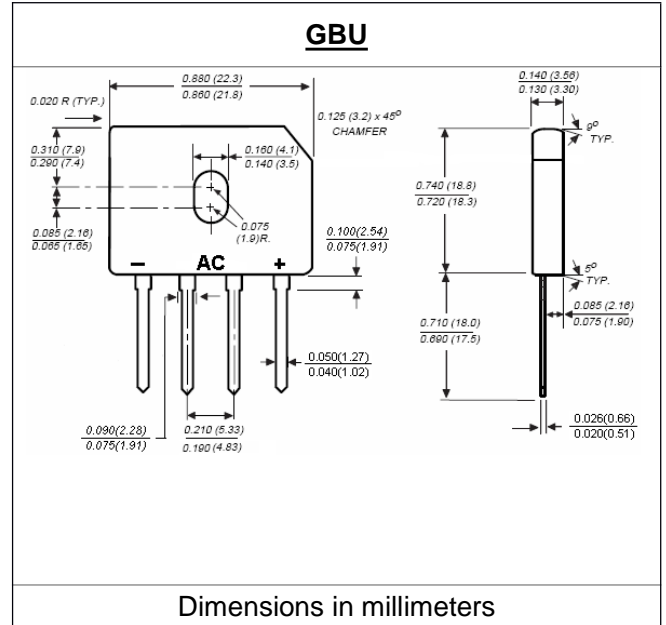

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated, for capacitive load, derate current by 20%)

	Symbol	GBU 8A	GBU 8B	GBU 8D	GBU 8G	GBU 8J	GBU 8K	GBU 8M	units
Maximum repetitive peak reverse voltage	V _{rrm}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{rms}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{dc}	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at T _c = 100°C (Note 1)	I _{f(av)}	8.0							A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	I _{fsm}	200							A
Maximum instantaneous forward voltage drop per leg at 8.0A	V _f	1.0							V
Rating for fusing (t < 8.3ms)	I ² t	166							A ² Sec
Maximum DC reverse current at rated DC blocking voltage per leg	I _r	5.0 500							μA
Typical junction capacitance per leg at 4V, 1MHz	C _j	211					94		pF
Maximum thermal resistance per leg (Note3)	R _{th(ja)} R _{th(jc)}	21 2.2							°C/W
Operating junction and storage temperature range	T _j , T _{stg}	-55 to +150							°C

Note:

- Unit case mounted on 3.2 x 3.2 x 0.12" thick (8.2 x 8.2 x 0.3cm) Al. Plate heatsink
- Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw
- Units mounted in free air, no heatsink on P.C.B. with 0.5 x 0.5" (12 x 12mm) copper pads, 0.375" (9.5mm) lead length

RATINGS AND CHARACTERISTIC CURVES GBU8A THRU GB8M

Fig. 1 – Derating Curve Output Rectified Current

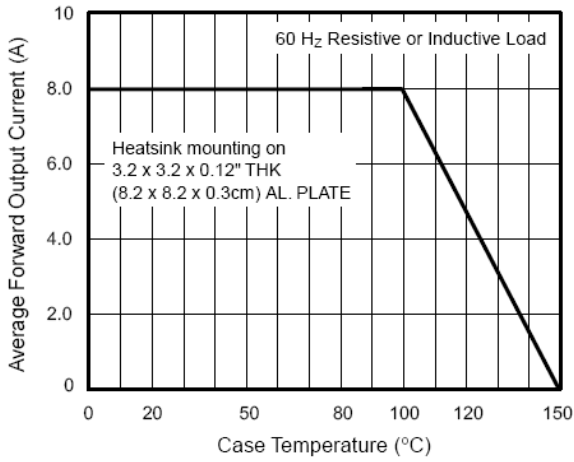


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current Per Leg

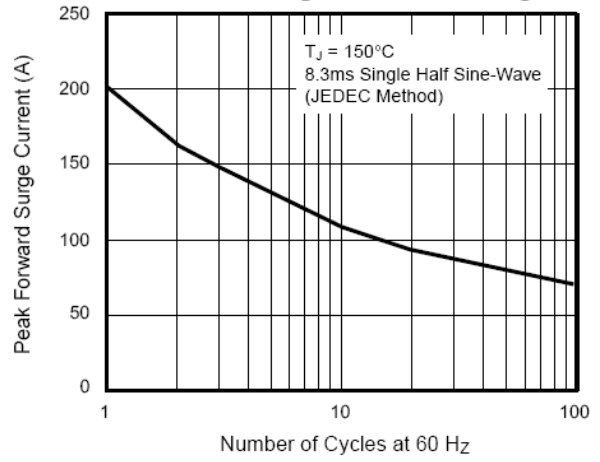


Fig. 3 – Typical Forward Characteristics Per Leg

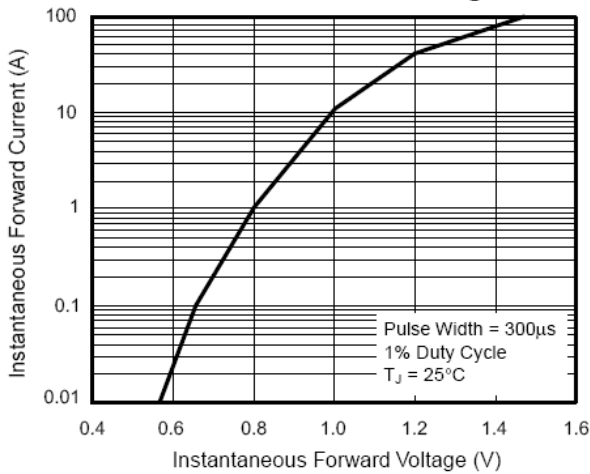


Fig. 4 – Typical Reverse Characteristics Per Leg

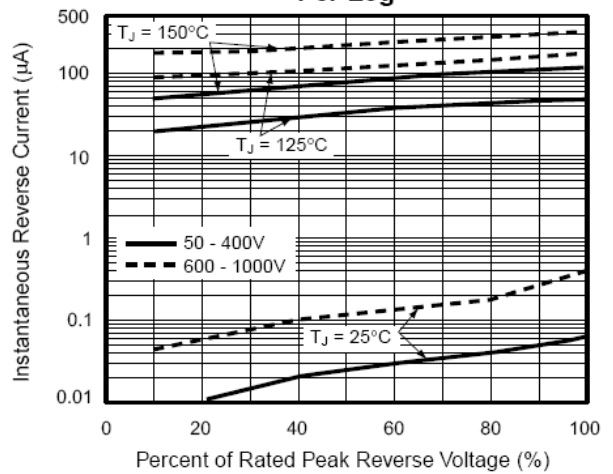


Fig. 5 – Typical Junction Capacitance Per Leg

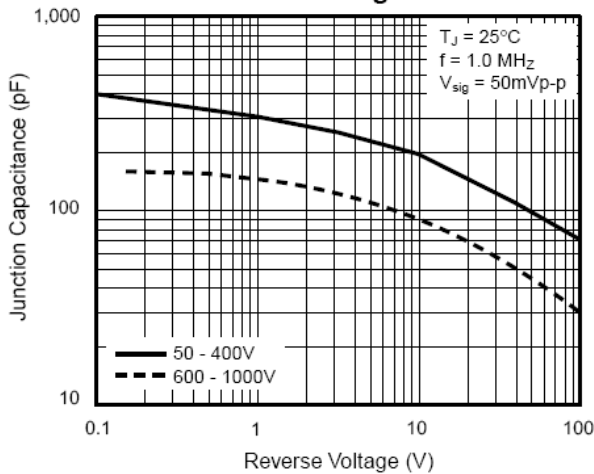


Fig. 6 – Typical Transient Thermal Impedance Per Leg

