

KA2211

LINEAR INTEGRATED CIRCUIT


5.8W DUAL POWER AMPLIFIER

The KA2211 is a dual audio power amplifier for consumer application. It is designed for high power, low dissipation and low noise.

It also contains various kind of protectors. It is suitable for car-audio power amplifier with high performance.

FEATURES

- Operating supply voltage range: $V_{CC} = 10V \sim 18V$
- High power (Dual)
 $P_o = 5.8W$ (Typ) at $V_{CC} = 13.2V$, $R_L = 4\Omega$, THD = 10%
- Low distortion (Dual)
THD = 0.06% (Typ) at $V_{CC} = 13.2V$, $R_L = 4\Omega$, $P_o = 1W$, $A_v = 52dB$
- Low noise (Dual)
 $V_{NO} = 0.7mV$ (Typ) at $V_{CC} = 13.2V$, $R_L = 4\Omega$, $R_o = 10K\Omega$,
 $A_v = 52dB$, BW(-3dB) = 20Hz ~ 20KHz
- Protector; Thermal shut down
Over voltage protection
DC short protection

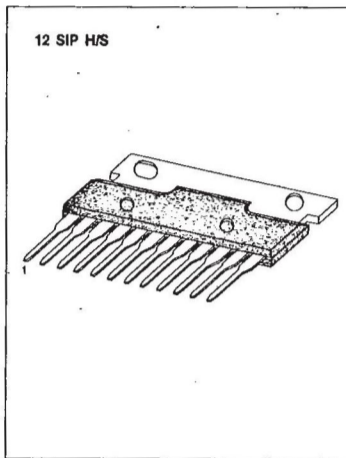

BLOCK DIAGRAM

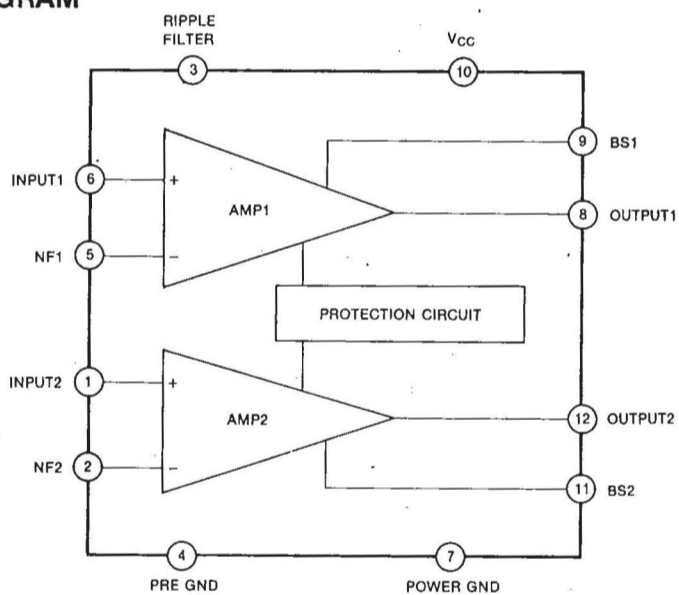


Fig. 1

T-74-05-01

KA2211**LINEAR INTEGRATED CIRCUIT****ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)**

Characteristic	Symbol	Condition	Value	Unit
Supply Voltage	V _{CC} (surge)	t = 0.2 sec	45	V
Maximum Supply Voltage	V _{CC} (max 1)	V _i = 0	25	V
Maximum Supply Voltage	V _{CC} (max 2)	with signal	18	V
Maximum Output Current	I _o (peak)		3.5	A
Power Dissipation	P _d		15	W
Operating Temperature	T _{opr}		-20 ~ +75	°C
Storage Temperature	T _{stg}		-40 ~ +150	°C

ELECTRICAL CHARACTERISTICS(Ta = 25°C, V_{CC} = 13.2V, R_L = 4Ω, R_g = 600Ω, f = 1KHz, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Quiescent Circuit Current	I _{CC}	V _i = 0		80	145	mA
Output Power	P _o	THD = 10%	5	5.8		W
Total Harmonic Distortion	THD	P _o = 1W		0.06	0.3	%
Voltage Gain	A _v	V _o = 0dBm	50	52	54	dB
Channel Balance	CB	V _o = 0dBm	-1	0	1	dB
Output Noise Voltage	V _{NO}	R _g = 10KΩ, BW(-3dB) = 20Hz ~ 20KHz		0.7	1.5	mV
Ripple Rejection Ratio	RR	f = 120Hz, V _r = 0dBm	40	52		dB
Cross Talk	CT	V _o = 0dBm		57		dB
Input Resistance	R _i	f = 1KHz		33		KΩ

T-74-05-01

KA2211

LINEAR INTEGRATED CIRCUIT

TEST AND APPLICATION CIRCUIT



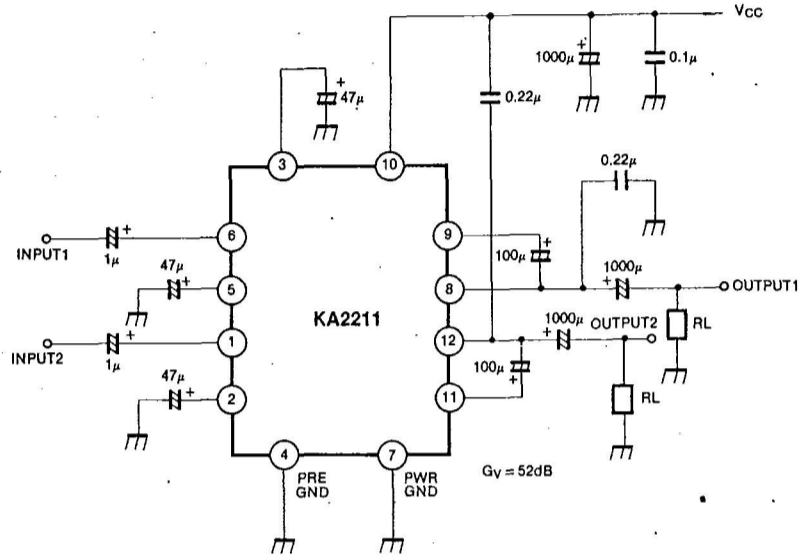


Fig. 2

TOTAL HARMONIC DISTORTION-OUTPUT POWER

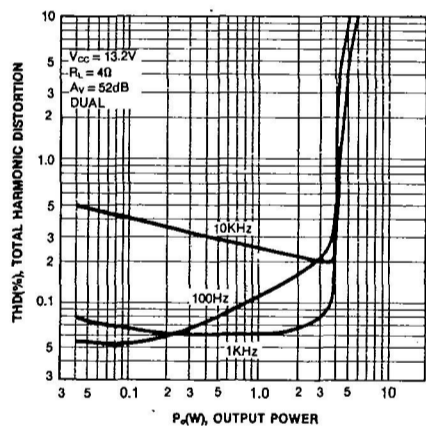







TOTAL HARMONIC DISTORTION-FREQUENCY

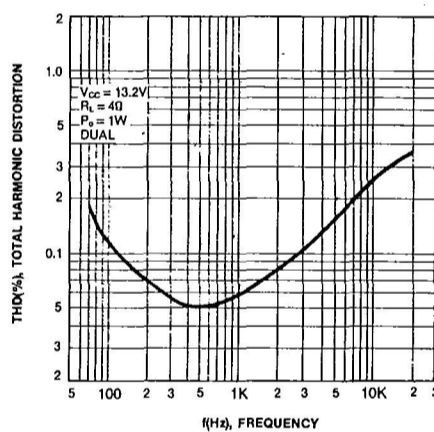

T-74-05-01

KA2211

LINEAR INTEGRATED CIRCUIT

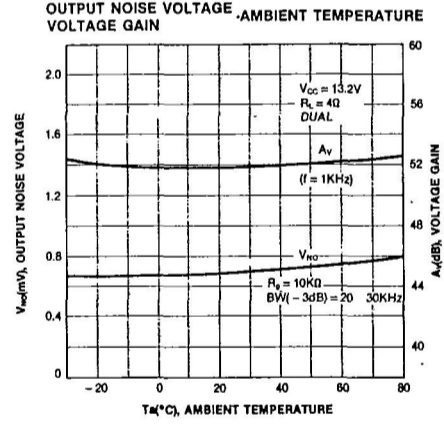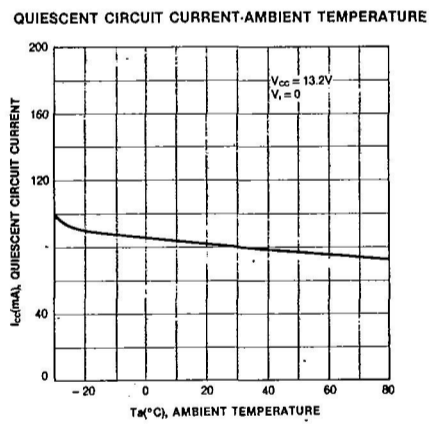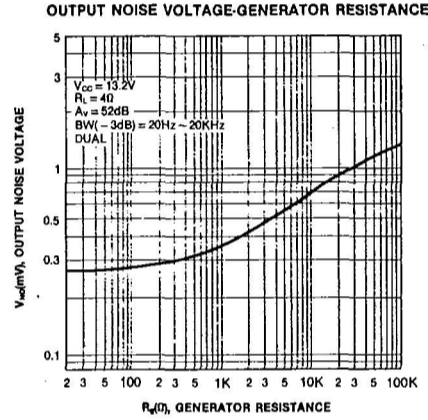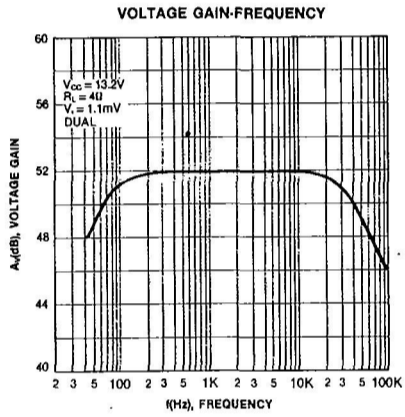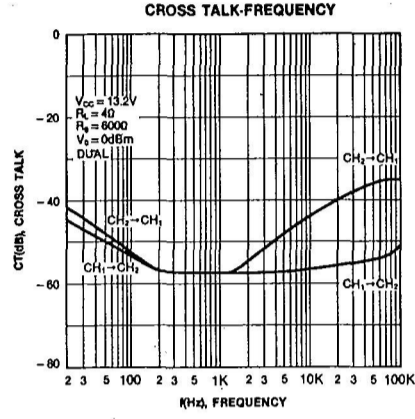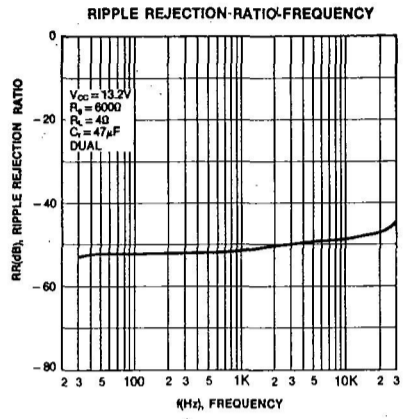


T-74-05-01


KA2211

LINEAR INTEGRATED CIRCUIT


QUIESCENT CIRCUIT CURRENT-SUPPLY VOLTAGE

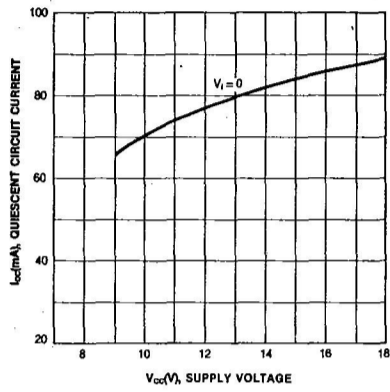


POWER DISSIPATION-SUPPLY VOLTAGE

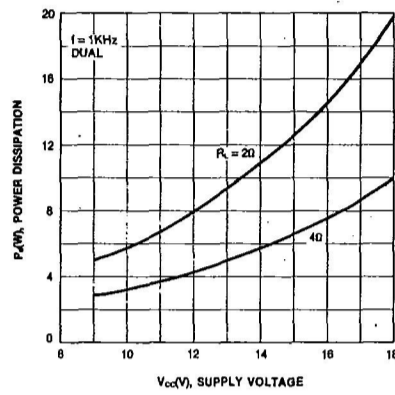


POWER DISSIPATION-OUTPUT POWER

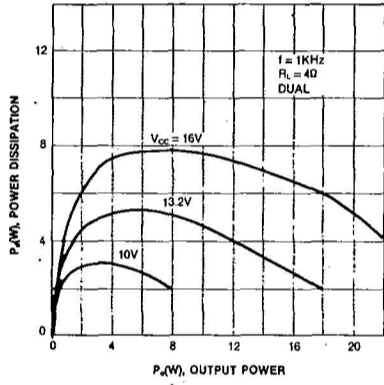

POWER DISSIPATION-OUTPUT POWER

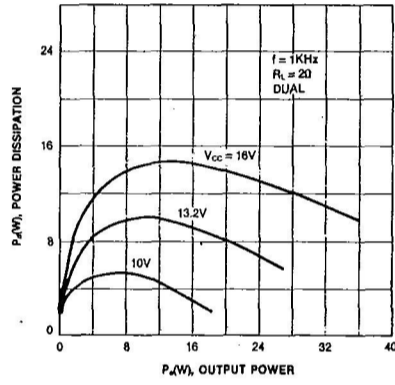

OUTPUT POWER-SUPPLY VOLTAGE

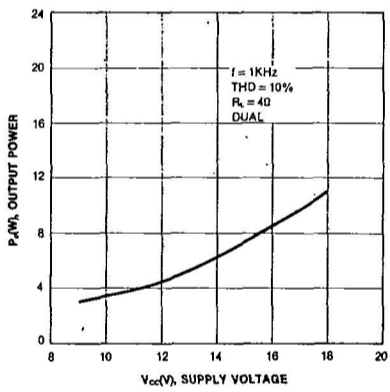

3