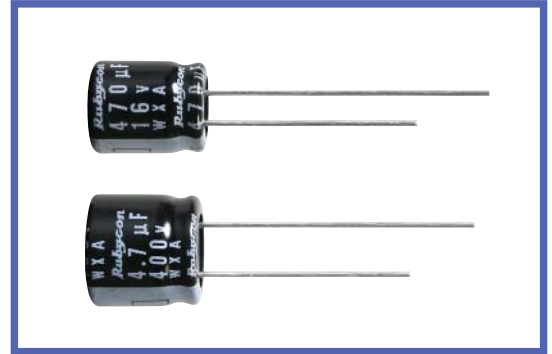


WXA SERIES
105°C Miniaturized low profile.
◆ FEATURES

- 9~25mm height.
- RoHS compliance.


◆ SPECIFICATIONS

Items	Characteristics																																																			
Category Temperature Range	-55 ~ +105°C	-40 ~ +105°C	-25 ~ +105°C																																																	
Rated Voltage Range	6.3~50V.DC	160~250V.DC	350~450V.DC																																																	
Capacitance Tolerance	±20%(20°C, 120Hz)																																																			
Leakage Current(MAX)	6.3~50V.DC		160~450V.DC																																																	
	I=0.01CV or 3µA whichever is greater. (After 2 minutes application of rated voltage)		CV ≤ 1000																																																	
			CV > 1000																																																	
		I=0.1CV+40µA (1minute)	I=0.04CV+100µA (1minute)																																																	
		I=0.03CV+15µA (5minutes)	I=0.02CV+25µA (5minutes)																																																	
I=Leakage Current(µA) C=Rated Capacitance(µF) V=Rated Voltage(V)																																																				
Dissipation Factor(MAX) (tanδ)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>tanδ φ 8, φ 10</td> <td>0.30</td> <td>0.26</td> <td>0.20</td> <td>0.18</td> <td>0.14</td> <td>0.12</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.25</td> </tr> <tr> <td>tanδ φ 12.5~φ 18</td> <td>0.26</td> <td>0.22</td> <td>0.18</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.25</td> </tr> </tbody> </table>												Rated Voltage (V)	6.3	10	16	25	35	50	160	200	250	350	400	450	tanδ φ 8, φ 10	0.30	0.26	0.20	0.18	0.14	0.12	0.20	0.20	0.20	0.20	0.20	0.25	tanδ φ 12.5~φ 18	0.26	0.22	0.18	0.16	0.14	0.12	0.20	0.20	0.20	0.20	0.20	0.25	(20°C, 120Hz)
	Rated Voltage (V)	6.3	10	16	25	35	50	160	200	250	350	400	450																																							
	tanδ φ 8, φ 10	0.30	0.26	0.20	0.18	0.14	0.12	0.20	0.20	0.20	0.20	0.20	0.25																																							
tanδ φ 12.5~φ 18	0.26	0.22	0.18	0.16	0.14	0.12	0.20	0.20	0.20	0.20	0.20	0.25																																								
When rated capacitance is over 1000µF, tanδ shall be added 0.02 to the listed value with increase of every 1000µF.																																																				
Endurance	After applying rated voltage with rated ripple current for 2000hrs at 105°C, the capacitors shall meet the following requirements.																																																			
	Capacitance Change		Within ± 25% of the initial value.																																																	
	Dissipation Factor		Not more than 200% of the specified value.																																																	
Leakage Current		Not more than the specified value.																																																		
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>3</td> <td>3</td> <td>6</td> <td>6</td> <td>6</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>—</td> <td>—</td> <td>—</td> <td>—</td> <td>—</td> <td>—</td> </tr> </tbody> </table>												Rated Voltage (V)	6.3	10	16	25	35	50	160	200	250	350	400	450	Z(-25°C)/Z(20°C)	4	3	2	2	2	2	3	3	3	6	6	6	Z(-40°C)/Z(20°C)	8	6	4	4	3	3	—	—	—	—	—	—	(120Hz)
	Rated Voltage (V)	6.3	10	16	25	35	50	160	200	250	350	400	450																																							
	Z(-25°C)/Z(20°C)	4	3	2	2	2	2	3	3	3	6	6	6																																							
Z(-40°C)/Z(20°C)	8	6	4	4	3	3	—	—	—	—	—	—																																								

◆ MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient

Frequency (Hz)		60(50)	120	500	1k	10k≤
Coefficient	1.5~6.8µF	0.65	1.0	1.20	1.30	1.50
	10~68µF	0.8	1.0	1.20	1.30	1.50
	100~1000µF	0.8	1.0	1.10	1.15	1.20
	2200~10000µF	0.8	1.0	1.05	1.10	1.15

◆ PART NUMBER

□□□	WXA	□□□□□	□	□□□	□□	D×L
Rated Voltage	Series	Rated Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size

