

# SRF1020CT THRU SRF10200CT

## SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts Forward Current - 10.0Amperes



### FEATURES


- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,Low forward voltage drop
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- Dual rectifier construction
- High temperature soldering guaranteed:260 °C/10 seconds, 0.25"(6.35mm)from case
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

### MECHANICAL DATA



- Case: JEDEC ITO-220AB molded plastic body
- Terminals: Lead solderable per MIL-STD-750,method 2026
- Polarity: As marked.
- Mounting Position: Any
- Weight: 0.08ounce, 2.24 gram

### ITO-220AB

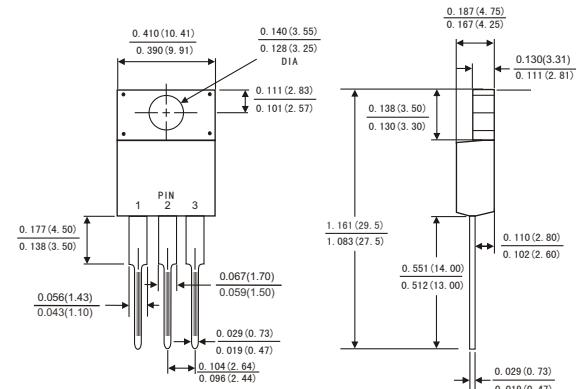

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

	Symbols	SRF 1020CT	SRF 1030CT	SRF 1045CT	SRF 1050CT	SRF 1060CT	SRF 1080CT	SRF 10100CT	SRF 10150CT	SRF 10200CT	Units						
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	45	50	60	80	100	150	200	Volts						
Maximum RMS voltage	V <sub>RMS</sub>	14	21	31.5	35	42	56	70	105	140	Volts						
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	45	50	60	80	100	150	200	Volts						
Maximum average forward rectified current (see Fig. 1)	I <sub>(AV)</sub>	5.0 10.0									Amps						
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	150									Amps						
Maximum instantaneous forward voltage at 10.0 A(Note 1 )	V <sub>F</sub>	0. 60		0.75		0.85		0.90		0.95							
Maximum instantaneous reverse current at rated DC blocking voltage (Note 1)	T <sub>A</sub> =25°C T <sub>A</sub> =125°C	IR	0.2								mA						
			15		50												
Typical thermal resistance (Note 2)	R <sub>θJC</sub>	2.5									°C/W						
Operating junction temperature range	T <sub>J</sub>	-65 to +150									°C						
Storage temperature range	T <sub>STG</sub>	-65 to +150									°C						

Notes: 1.Pulse test: 300 μ s pulse width,1% duty cycle

2.Thermal resistance from junction to case

# SRF1020CT THRU SRF10200CT

## SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts Forward Current - 10.0Amperes



FIG.1-FORWARD CURRENT DERATING CURVE

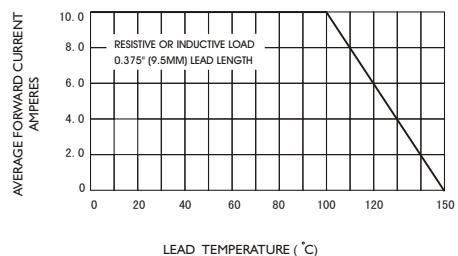


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

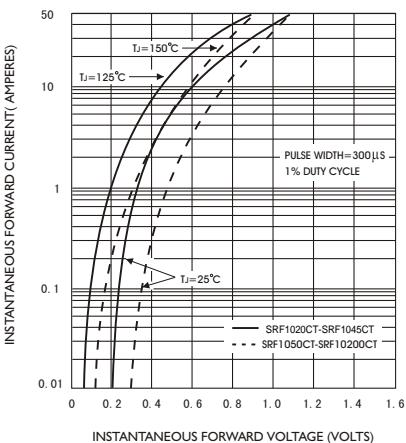


FIG.5-TYPICAL JUNCTION CAPACITANCE

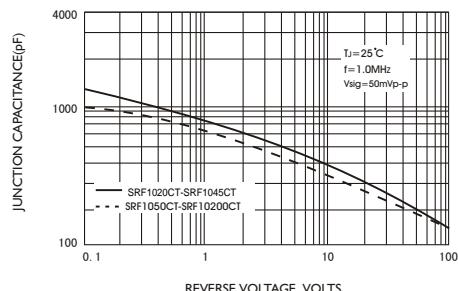


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

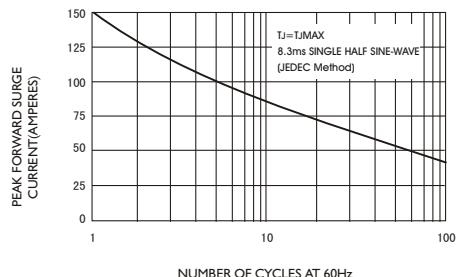


FIG.4-TYPICAL REVERSE CHARACTERISTICS

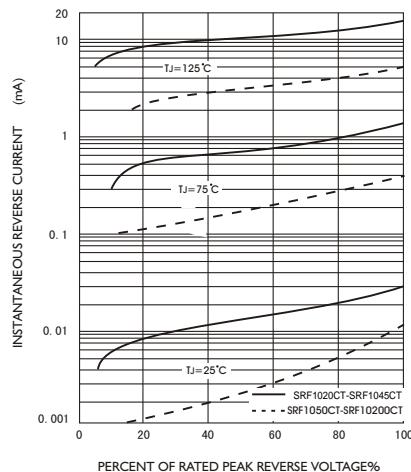


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

