


## PCB Relay—JZC-22F(21F)

### Order Model

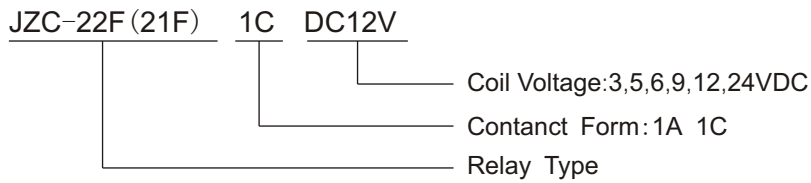

### Contact Data

Contact Form	1A,1C
Contact Material	AgCdO
Contact Resistance	$\leq 100M\Omega$ (1A 6VDC)
Max Switching Current	15A
Rated Load	15A 125VAC/30VDC 12A 250VAC/30VDC

### Coil Specification


Coil Voltage	3~48VDC
Coil Power	0.36W,0.45W

### Technical Specification


Insulation Resistance	$\geq 1000M\Omega$ (500VDC)
Dielectric Strength (Between coil and Contact)	$\geq 1500VAC$
Operate Time	$\leq 10ms$
Release Time	$\leq 5ms$
Mechanical Life	$1 \times 10^7$
Electrical Life	$1 \times 10^5$
Install Mode	PCB
Weight	11g

### Dimension / Mounting holes / Wiring diagram

JZC-22F Outline dimension

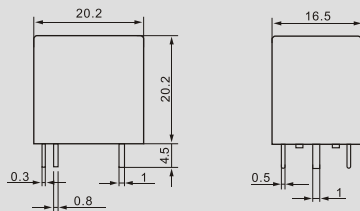

JZC-22F Mounting holes (Bottom view)

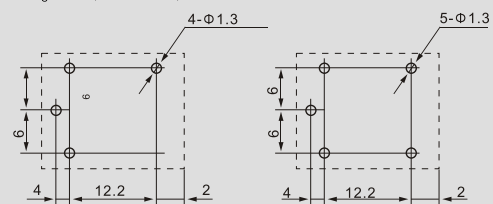

JZC-22F Wiring diagram (Bottom view)

