

# MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS


**RP**

Low Impedance  
Series



- High reliability long life(10000 hours)
- Operating temperature  $-55 \sim +105^{\circ}\text{C}$
- Enabled high ripple current by a reduction of impedance at high frequency
- Ideally suited for use in switching power supply, main board
- Complied to the RoHS directive


RZ → **RP**  
Long life



Item	Characteristics										
Operating temperature range	$-55 \sim +105^{\circ}\text{C}$										
Leakage current max.	$I = 0.01\text{CV}$ or $3\mu\text{A}$ whichever is greater (after 2 minutes)										
Capacitance tolerance	$\pm 20\%$ at 120Hz, $20^{\circ}\text{C}$										
Dissipation factor max. (at 120Hz, $20^{\circ}\text{C}$ )	Capacitance $> 1000\mu\text{F}$ : $\tan\delta$ increases by 0.02 for each $1000\mu\text{F}$ from below value.										
	WV	6.3	10	16	25	35	50				
	$\tan\delta$	0.22	0.19	0.16	0.14	0.12	0.10				
Low temperature characteristics (Impedance ratio at 120Hz)	WV	6.3	10	$16 \sim 25$		$35 \sim 50$					
	Z- $55^{\circ}\text{C}$ /Z+ $20^{\circ}\text{C}$	3	3	3		3					
Load life	After an application of DC bias voltage plus the rated AC ripple current for 10000 hours at $105^{\circ}\text{C}$ . The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.										
	Leakage current	Less than specified value									
	Capacitance change	Within $\pm 20\%$ of initial value									
	$\tan\delta$	Less than 200% of specified value									
	$\varnothing D$	$\varnothing D = 5, 6.3$	$\varnothing D = 8$	$\varnothing D = 10$	$\varnothing D \geq 12.5$						
	Life time	4000 hours	6000 hours	7000 hours	10000 hours						
Shelf life (at $105^{\circ}\text{C}$ )	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at $20^{\circ}\text{C}$ by the KS C IEC 60384 - 4										

## ● DRAWING

Unit : mm

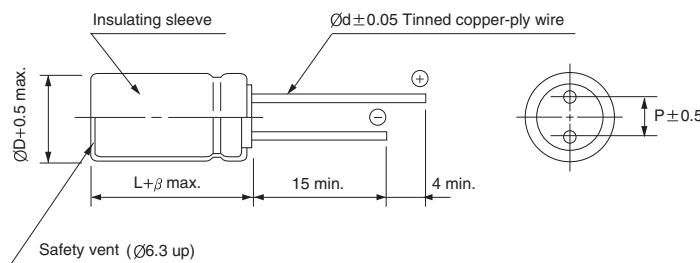

$\varnothing D$	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
$\varnothing d$	0.5	0.5	0.6	0.6	0.6	0.8	0.8
$\beta$	1.5		2.0				

## ● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

$\mu\text{F}$	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz $\leq$
~ 33		0.40	0.65	0.82	0.91	1.00
39 ~ 270		0.50	0.70	0.84	0.92	1.00
330 ~ 680		0.55	0.75	0.86	0.93	1.00
820 ~ 1800		0.60	0.80	0.88	0.94	1.00
2200 ~		0.70	0.85	0.90	0.95	1.00

**RP** series

## ● DIMENSIONS &amp; MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item $\mu\text{F}$	6.3			10			16		
	$\varnothing\text{D} \times \text{L}$ (mm)	Impedance ( $\Omega$ )max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing\text{D} \times \text{L}$ (mm)	Impedance ( $\Omega$ )max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing\text{D} \times \text{L}$ (mm)	Impedance ( $\Omega$ )max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
47							5 × 11	0.65	180
68				5 × 11	0.65	180	6.3 × 11	0.30	280
100	5 × 11	0.65	180	5 × 11	0.65	180	6.3 × 11	0.30	280
150	5 × 11	0.65	280	6.3 × 11	0.30	280	6.3 × 11	0.30	280
220	6.3 × 11	0.30	280	6.3 × 11	0.30	280	8 × 11.5	0.14	450
330	6.3 × 11	0.30	280	8 × 11.5	0.14	450	8 × 11.5	0.14	450
470	8 × 11.5	0.14	450	8 × 11.5	0.14	450	10 × 12.5	0.10	660
680	10 × 12.5	0.10	660	10 × 12.5	0.10	660	10 × 16	0.08	850
1000	10 × 12.5	0.10	660	10 × 16	0.08	850	10 × 20	0.054	1100
1500	10 × 20	0.054	1100	10 × 20	0.054	1100	12.5 × 20	0.050	1400
2200	12.5 × 20	0.050	1400	12.5 × 20	0.050	1400	12.5 × 25	0.038	1700
3300	12.5 × 20	0.050	1400	12.5 × 25	0.038	1700	16 × 25	0.030	2100
4700	16 × 25	0.030	2100	16 × 31.5	0.030	2100	16 × 25	0.025	2600
6800	16 × 25	0.030	2100	16 × 31.5	0.025	2600	16 × 35.5	0.022	3000
10000	16 × 31.5	0.025	2600	18 × 35.5	0.022	3000			
15000	18 × 35.5	0.022	3000						

WV Item $\mu\text{F}$	25			35			50		
	$\varnothing\text{D} \times \text{L}$ (mm)	Impedance ( $\Omega$ )max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing\text{D} \times \text{L}$ (mm)	Impedance ( $\Omega$ )max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing\text{D} \times \text{L}$ (mm)	Impedance ( $\Omega$ )max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
1.0							5 × 11	3.5	40
2.2							5 × 11	3.0	55
3.3							5 × 11	2.6	65
4.7							5 × 11	2.3	90
6.8							5 × 11	1.4	120
10							5 × 11	1.4	120
22				5 × 11	0.70	180	5 × 11	1.2	150
33	5 × 11	0.70	180	5 × 11	0.65	180	6.3 × 11	0.85	200
47	5 × 11	0.65	180	6.3 × 11	0.30	280	6.3 × 11	0.70	250
68	6.3 × 11	0.30	280	8 × 11.5	0.14	450	8 × 11.5	0.24	340
100	6.3 × 11	0.30	280	8 × 11.5	0.14	450	8 × 11.5	0.24	340
150	8 × 11.5	0.14	450	8 × 11.5	0.14	450	10 × 12.5	0.17	490
220	8 × 11.5	0.14	450	10 × 12.5	0.10	660	10 × 16	0.12	650
330	10 × 12.5	0.10	660	10 × 16	0.080	850	10 × 20	0.10	810
470	10 × 16	0.080	850	10 × 20	0.054	1100	12.5 × 20	0.085	1100
680	10 × 20	0.054	1100	12.5 × 20	0.050	1400	12.5 × 25	0.065	1200
1000	12.5 × 20	0.050	1400	12.5 × 25	0.038	1700	16 × 31.5	0.043	1600
1500	16 × 25	0.030	1400	16 × 31.5	0.030	2100	16 × 31.5	0.038	2000
2200	16 × 25	0.030	2100	16 × 31.5	0.025	2600	18 × 35.5	0.034	2300
3300	16 × 31.5	0.025	2600	18 × 35.5	0.022	3000			
4700	18 × 35.5	0.022	3000						