


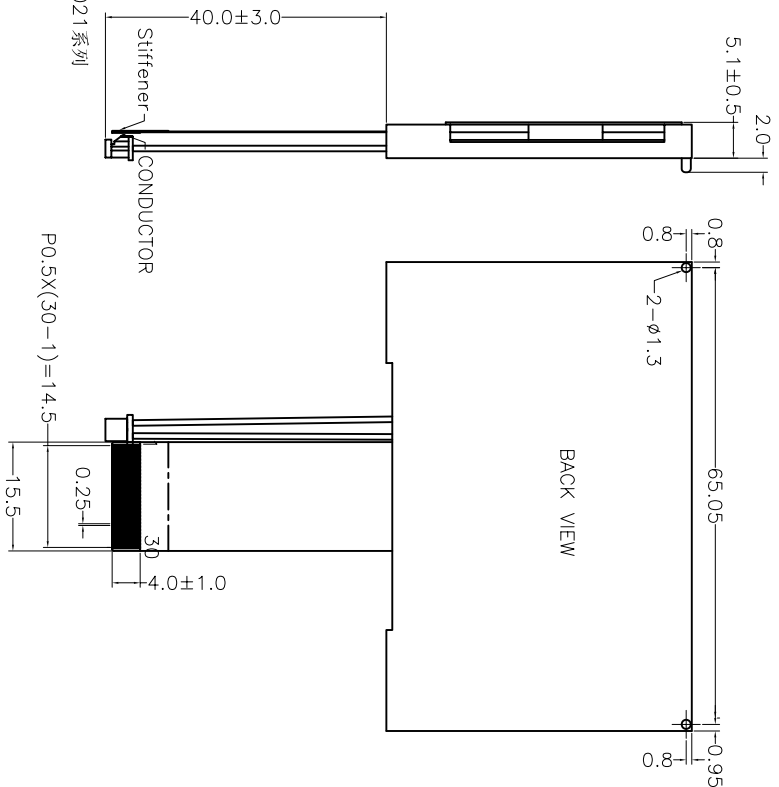


VERSION	CHANGE CONTENT	DATE
V00	FIRST ISSUE	2011-02-16

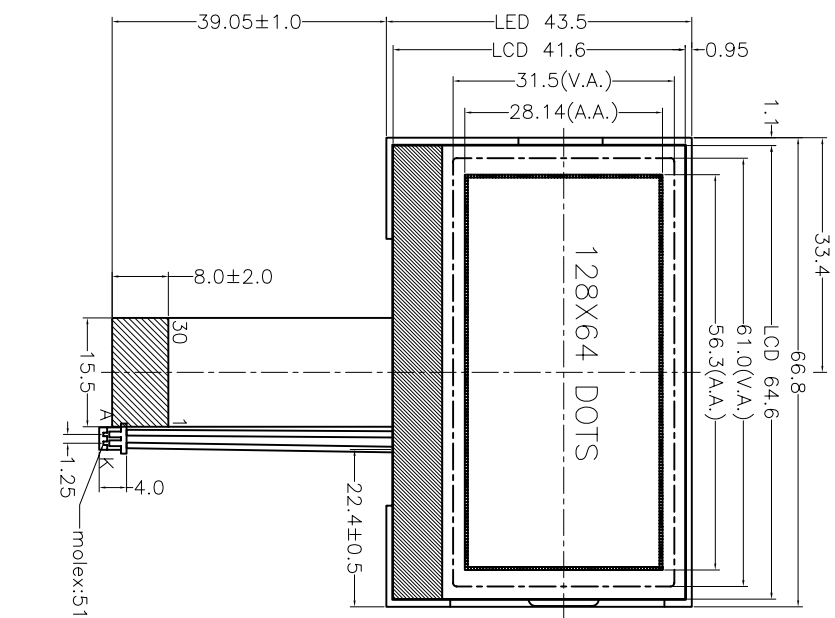

PIN	NAME	PIN	NAME
1	/CS1	19	CAP1+
2	/RES	20	CAP2+
3	A0	21	CAP2-
4	/WR	22	V1
5	/RD	23	V2
6	D0	24	V3
7	D1	25	V4
8	D2	26	V0
9	D3	27	VR
10	D4	28	C86
11	D5	29	PS
12	D6	30	IRS
13	D7		
14	VDD		
15	VSS		
16	YOUT		
17	CAP3+		
18	CAP1-		

SPECIFICATIONS

1. DISPLAY TYPE: STN / TRANSMISSIVE / POSITIVE / Y-G
  2. LCD DRIVING VOLTAGE: 8.5 V
  3. LOGIC VOLTAGE: 3.3 V
  4. VIEWING DIRECTION: 12 O'CLOCK
  5. OPERATING TEMP: -30° C ~ +70° C
  6. STORAGE TEMP: -30° C ~ +80° C
  7. DRIVE MODE: 1/65 DUTY, 1/9 BIAS
  8. BACKLIGHT: GREEN / SIDE BACKLIGHT / 3.1V
- MECHANICAL TOL: ±0.3 UNLESS SPECIFIED

NOTE:

- 1 背光工作电压3.1V, 电流30mA
- 2 以后做货Vop:8.5V 工作温度: -20° c~70° c, 视角12点

DESCRIPTION:

C/D

SCALE: FIT

SHEET: 1 OF 1

UNIT: mm

APP: DATE:

CHK: DATE:



MODEL: T12864-C0C28C

INDUSTRIAL CO., LTD.

DATE:

DATE: