
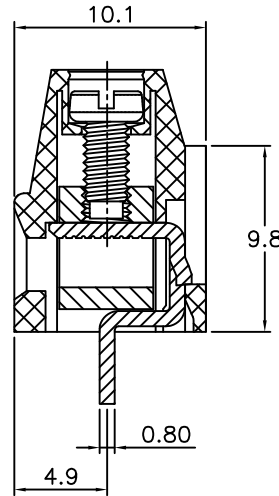
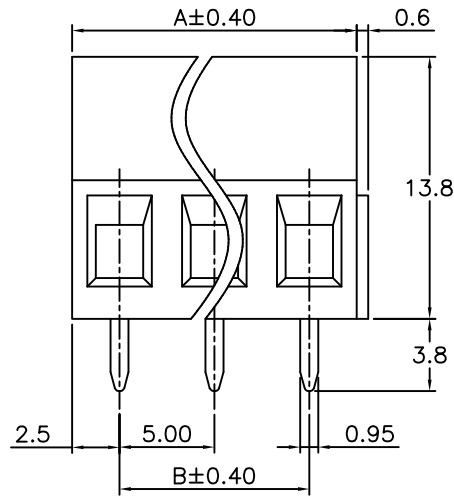


REV.	SPECIFICATION	ECN NO.	APPD.



Material:

Housing: Thermoplastic Polyester UL94V-0.

Solder Pin: Copper Alloy, Tin Plated.

Clamp: Copper Alloy, Ni Plated.

Screw: Metal, Zinc Plated, M2.5.

Electrical Characteristics:

Voltage Rating: 300V.

Current Rating: 10A.

Solid Wire(AWG): 12-24.

Stranded Wire(AWG): 12-24.


Torque(Lb-In): 3.5.

Wire Strip Length: 6-7mm.

Withstanding Voltage: 1.6KV.

Operating Temperature: -40°C~+115°C.

***RoHS Compliant**

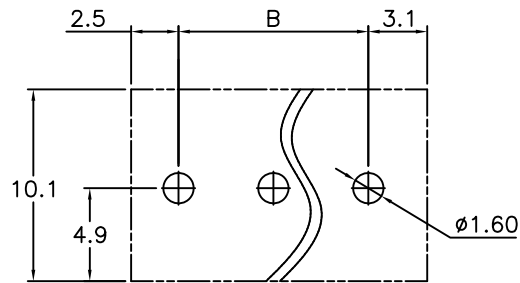

P.C. Board Layout

8932- F 101138 G AA xx S B
 Series F:Pitch 5.0mm Manufacturing Code G:Green AA:Slotted No. of Screw Positions AB:Combination "+"Screw S:Straight B:Bulk Package

Position	2 Thru 24
Dimension	
A	No. of PositionsX5.0
B	(No. of Positions-1)X5.0

Tolerances	Dwg. No.	8932D02012	Title:		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 8932-F101138GAAXSB SHEET 1/1 Ver.No. X3
x = ±0.50	Projection		8932 Series		
.x = ±0.30	Unit	mm	5.0mm Terminal Block		
.xx = ±0.15	Scale	1:1	(Old P/N:8500-XXTS11-05)		
	Drawn By	Sunny 04/23'15	①780		