


**SIKOREL® 125, LL grade**

**Extremely high reliability and long useful life**

**Construction**

- Charge-discharge proof, polar
- Aluminum case, partially insulated
- Solder pin terminals on mounting base that is securely welded to case, ensuring perfect electrical contact
- Positive pole connection brought out axially at center
- Negative pole connected to two or three solder pins of the mounting base



KAL0276-R

**Features**

- Extremely high reliability and long useful life
- Very wide temperature range
- Outstanding parametric stability
- High ripple current capability
- Can be operated at temperatures of up to 145 °C 1)
- Shelf life up to 10 years
- Pinning ensures correct insertion


**Applications**

- High-reliability equipment in industrial and automotive electronics

**Specifications and characteristics in brief**


Rated voltage $U_R$	10 to 100 V-	
Surge voltage $U_S$	$1,15 \cdot U_R$	
Rated capacitance $C_R$	47 to 4 700 $\mu$ F	
Capacitance tolerance	- 10/+ 50 % $\triangleq$ T	
Useful life	$d \leq 18$ mm	$d = 21$ mm, 25 mm
	40 °C, $U_R$	> 200 000 h ( $3,5 \cdot I_{-R,125^\circ\text{C}}$ )
	85 °C, $U_R$ ; $I_{-max}$	> 15 000 h
125 °C, $U_R$ ; $I_{-R}$	> 3 000 h	> 10 000 h
Failure percentage	$\leq 0,5$ % (during useful life)	
Failure rate	$\leq 10$ fit ( $\leq 10 \cdot 10^{-9}/\text{h}$ )	
Voltage endurance test	2 000 h, 125 °C (at $U_R$ )	

1) Operation at 145 °C and 0,6  $V_R$  permissible for a total of 500 h.




### Specifications and characteristics in brief

Leakage current $I_{lka}$ (5 min, 20 °C)	$I_{lka} \leq 0,3 \mu A \cdot \left( \frac{C_R}{\mu F} \cdot \frac{U_R}{V} \right)^{0,7} + 4 \mu A$						
Self-inductance $L_{ESL}$	$d$ (mm)	12	14	16	18	21	25
	$l$ (mm)	30	30	30	39,5	40	40
	$L_{ESL}$ approx. (nH)	23	37	37	37	17	17
IEC climatic category	in accordance with IEC 68-1 55/125/56 (– 55 °C/+ 125 °C, 56 days damp heat test)						
Detail specification	similar to CECC 30 301-802						
Sectional specification	IEC 384-4						
Vibration resistance	in accordance with IEC 68–2–6, test Fc: displacement amplitude 0,75 mm, frequency range 10 ... 55 Hz, acceleration max. 10 g, duration 3 × 2 h						



# B 41 592



## Dimensional drawing

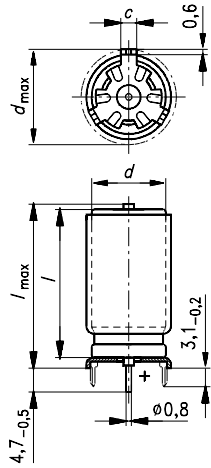

Mounting holes  
 $d = 12 \dots 14 \text{ mm}$

$d = 16 \dots 25 \text{ mm}$







Soldering star and supports are connected to the negative pole



Dimensions (mm)				Approx weight (g)	Packing units (pieces)
$d \times l$	$d_{\max} \times l_{\max}$	$a \pm 0,1$	$c \pm 0,1$		
12 × 30	13,5 × 33	12,5	3,0	5,7	480
14 × 30	15,5 × 33	14,5		7,9	480
16 × 30	17,5 × 33	16,5		9,8	300
18 × 39,5	19,5 × 40,8	18,5		15	200
21 × 40	22,5 × 42	21,5	3,5	19	128
25 × 40	26,5 × 42	25,5		27	128


The PC-board hole arrangement specified above is based on circular arcs.

If, however, the mounting holes have to be matched to a standard drilling raster, a spacing of 1,27 mm ( $1/20''$ ) has proved to be sufficiently accurate if the following arrangements are used:



Not for new design

For new design see type B 41 784, [page 330](#)




### Overview of available types

$U_R$ (V-)	10	16	25	40	63	100
$C_R$ ( $\mu$ F)	Case dimensions $d \times l$ (mm)					
47						12 × 30
100					12 × 30	16 × 30
220			12 × 30	12 × 30	16 × 30	18 × 39,5
470	12 × 30	12 × 30	14 × 30	16 × 30	18 × 39,5	25 × 40
1 000	14 × 30	16 × 30	18 × 39,5	21 × 40	25 × 40	
2 200	18 × 39,5	18 × 39,5	21 × 40	25 × 40		
4 700	25 × 40	25 × 40				

The capacitance and voltage ratings listed above are available in different cases upon request. Other voltage and capacitance ratings are also available upon request.

Not for new design. For new design see type B 41 784, [page 330](#)




## B 41 592

### Technical data and ordering codes

$U_R$	$C_R$	Case dimensions $d \times l$ mm	$R_{ESR, typ}$ 100 Hz 20 °C $\Omega$	$R_{ESR, max}$ 100 Hz 20 °C $\Omega$	$Z_{max}$ 10 kHz 20 °C $\Omega$	$I_{~max}$ 100 Hz 40 °C A	$I_{~max}$ 100 Hz 85 °C A	$I_{~R}$ 100 Hz 125 °C A	Ordering code <sup>1)</sup>  Short code
<b>B41 592-</b>									
10	470	12 × 30	0,29	0,56	0,22	1,8	1,3	0,45	-A3477-T
	1 000	14 × 30	0,14	0,26	0,14	2,8	1,9	0,69	-A3108-T
	2 200	18 × 39,5	0,06	0,12	0,10	5,6	3,9	1,4	-A3228-T
	4 700	25 × 40	0,04	0,07	0,07	8,0	5,6	2,0	-A3478-T
16	470	12 × 30	0,25	0,48	0,22	2,0	1,4	0,49	-A4477-T
	1 000	16 × 30	0,12	0,23	0,12	3,2	2,2	0,80	-A4108-T
	2 200	18 × 39,5	0,06	0,10	0,10	5,6	3,9	1,4	-A4228-T
	4 700	25 × 40	0,04	0,06	0,06	8,0	5,6	2,0	-A4478-T
25	220	12 × 30	0,41	0,79	0,38	1,5	1,1	0,38	-A5227-T
	470	14 × 30	0,20	0,37	0,20	2,3	1,6	0,58	-A5477-T
	1 000	18 × 39,5	0,10	0,18	0,12	4,0	2,8	1,0	-A5108-T
	2 200	21 × 40	0,05	0,10	0,10	6,4	4,5	1,6	-A5228-T
40	220	12 × 30	0,34	0,64	0,36	1,7	1,2	0,42	-A7227-T
	470	16 × 30	0,16	0,30	0,20	2,8	1,9	0,69	-A7477-T
	1 000	21 × 40	0,08	0,16	0,12	5,2	3,6	1,3	-A7108-T
	2 200	25 × 40	0,04	0,08	0,08	8,0	5,6	2,0	-A7228-T
63	100	12 × 30	0,63	1,2	0,66	1,2	0,87	0,31	-A8107-T
	220	16 × 30	0,31	0,56	0,34	2,0	1,4	0,50	-A8227-T
	470	18 × 39,5	0,14	0,26	0,18	3,5	2,5	0,88	-A8477-T
	1 000	25 × 40	0,08	0,14	0,12	5,6	3,9	1,4	-A8108-T
100	47	12 × 30	1,8	3,4	1,9	0,72	0,50	0,18	-A9476-T
	100	16 × 30	0,79	1,5	0,90	1,2	0,87	0,31	-A9107-T
	220	18 × 39,5	0,38	0,72	0,50	2,2	1,5	0,54	-A9227-T
	470	25 × 40	0,20	0,38	0,30	3,5	2,5	0,88	-A9477-T

Not for new design. For new design see type B 41 784, [page 330](#)


1) To obtain the required ordering code, prefix the type number to the short code. E. g.: B41592-A3477-T




**Useful life**

versus ambient temperature  $T_A$  under ripple current operating conditions <sup>1)</sup>


$d \geq 12 \text{ mm} \dots 18 \text{ mm}$

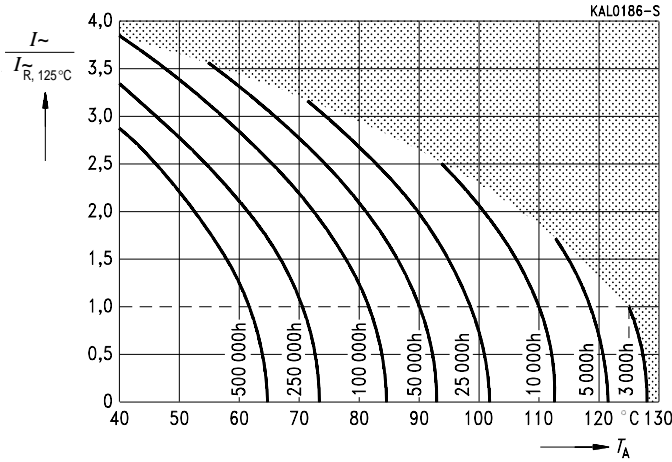

$d = 21 \text{ mm}, 25 \text{ mm}$

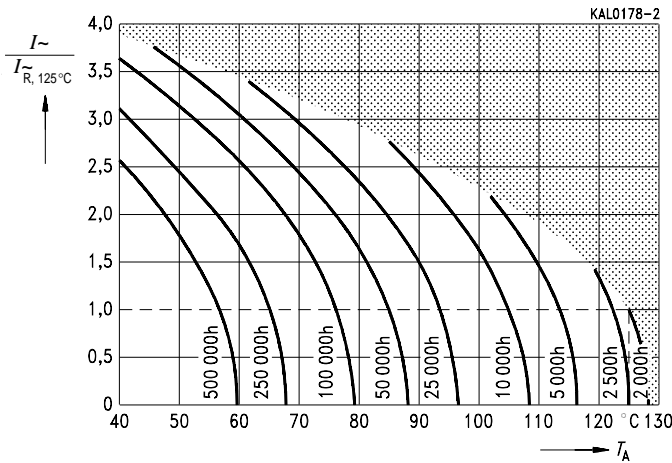


<sup>1)</sup> Refer to [page 34](#) for an explanation on how to interpret the useful life graphs.




# B 41 592


**Permissible ripple current  $I_f$  versus frequency  $f$**

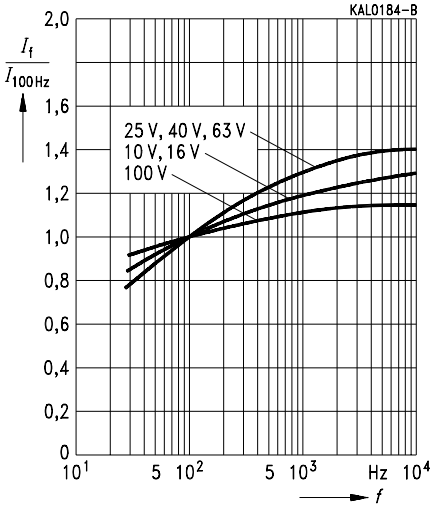


**Series capacitance  $C_s$  at  $f = 100$  Hz versus temperature  $T$**   
Typical behavior

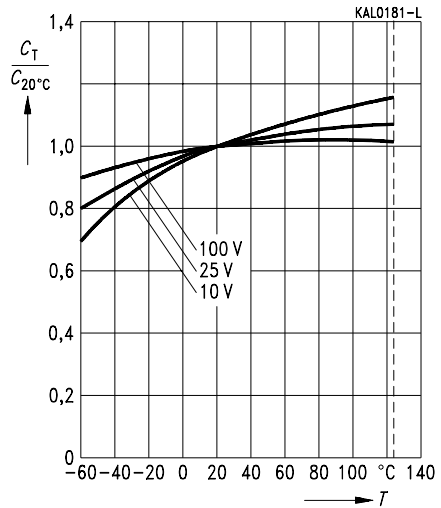


**Equivalent series resistance  $R_{ESR}$  at  $f = 100$  Hz versus temperature  $T$**   
Typical behavior

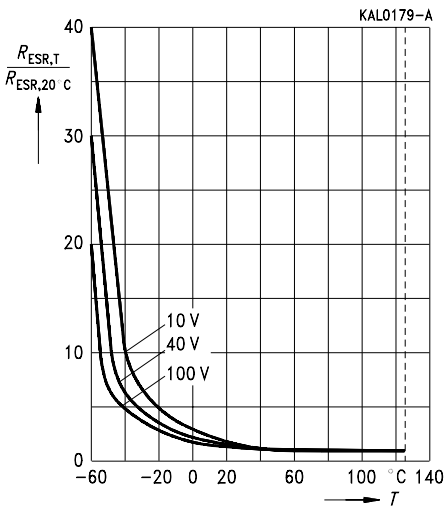


**Impedance  $Z$  at 10 kHz versus temperature  $T$**   
Typical behavior

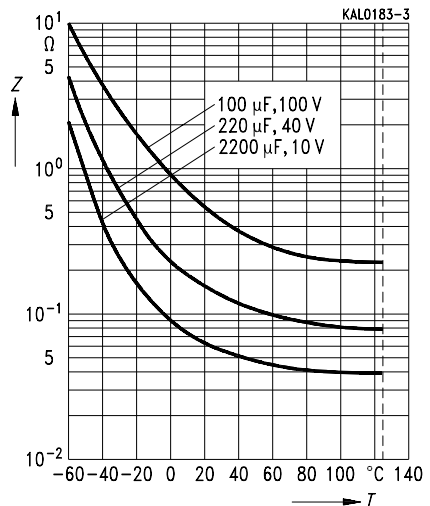



**Impedance  $Z$**

versus frequency  $f$   
for  $U_R = 40\text{ V}$ -, at  $20^\circ\text{C}$   
Typical behavior

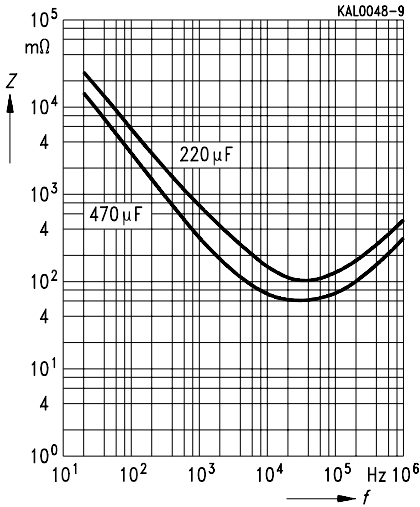

**Impedance  $Z$**

versus frequency  $f$   
and temperature  $T$  for  $470\ \mu\text{F}/40\text{ V}$ -  
Typical behavior

