

SPECIFICATIONS

Security Digital Card Connector

Mechanical

Card Insertion Force: 1.5Kg (3.31Lb) max.
Durability: 10000 Cycles


WK Series
Right Angle, SMT
Push Push Type
With Detect Switches
9 Pos.

Electrical


Operating Voltage: 3.3V
Operating Current: 100mA
Contact Current Carrying Capacity : 500mA max.
Contact Resistance: 30mW max. initial
Dielectric Withstanding Voltage: 500Vrms AC min.
Insulation Resistance: 1000MW max. initial

Physical

Housing: Thermoplastic, UL 94V-0 rated in Black Color
Contact: Copper Alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -20 to +85

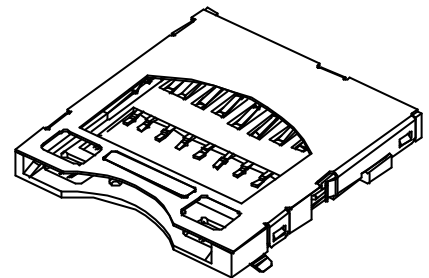

DRAWING

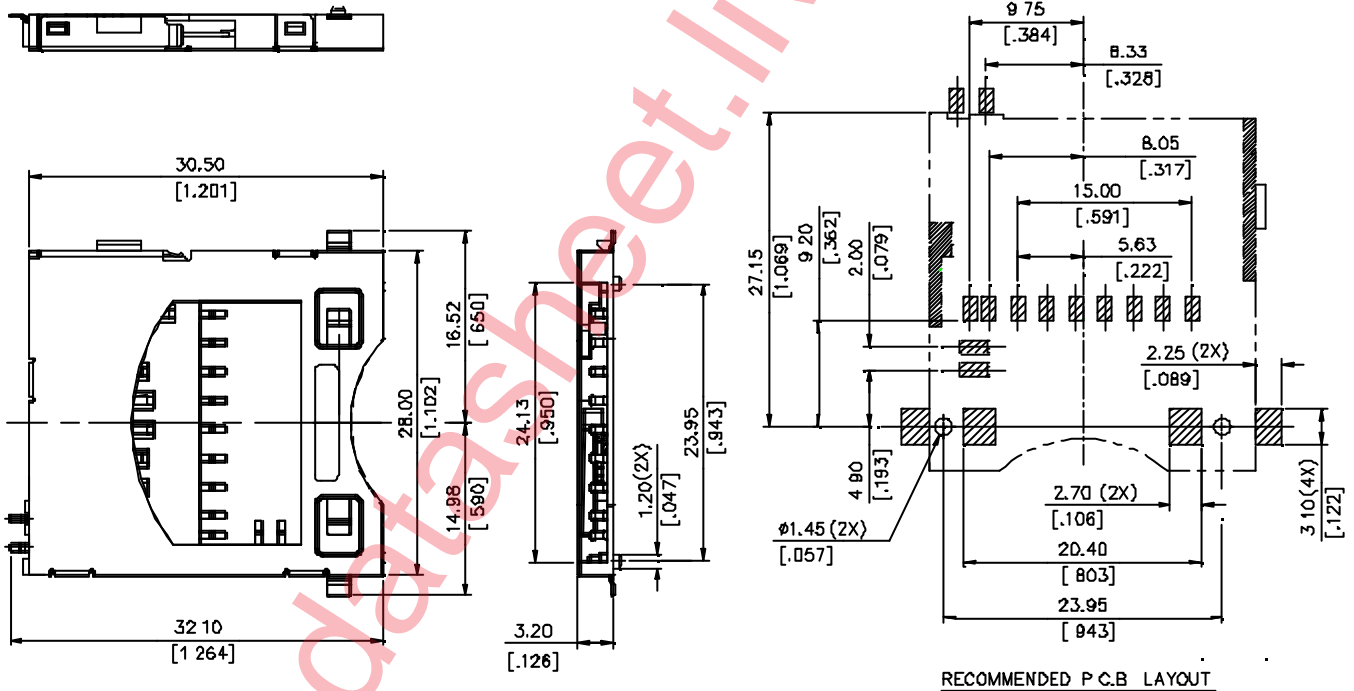

ORDERING INFORMATION

PRODUCT NO.: WK 2 1 9 2 3 - S1P - 7F

Termination Type
 2=SMT.

Switch Type
 1=Normal Open.

No. of Pos.
 9=9 Pos.

LEAD FREE CODE
 F=LEAD FREE
 PACKAGE CODE
 7=TAPE REEL

Extension Code
 Contact Area Plating
 3=30u" Gold

Cover Type
 2=Metal Cover Type